
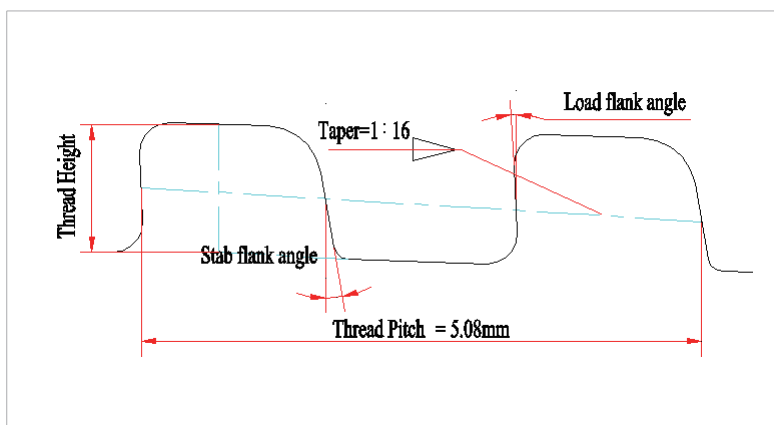


GY-3气密封特殊连接

GY-3 GAS - TIGHT PREMIUM CONNECTION

GY-3气密封特殊连接螺纹不同于API 偏梯型螺纹，采用倒钩形式，保证了连接具有与管体等同的连接强度，同时采用金属-金属锥面密封形式，保证了GY-3特殊连接拥有良好的气密封能力。GY-3气密封特殊连接适用于深井、超深井、水平井和大位移井等条件苛刻的井况。

GY-3 connection adopts inverted hook type thread instead of API buttress thread to ensure equal joint strength between the connection and pipe body. Meanwhile metal to metal cone seal of GY-3 premium thread results in enhanced gas tight performance. Casing with GY-3 premium connections are suitable for deep, ultra-deep, horizontal and extended reach oil and gas wells etc. which are with rigorous conditions.

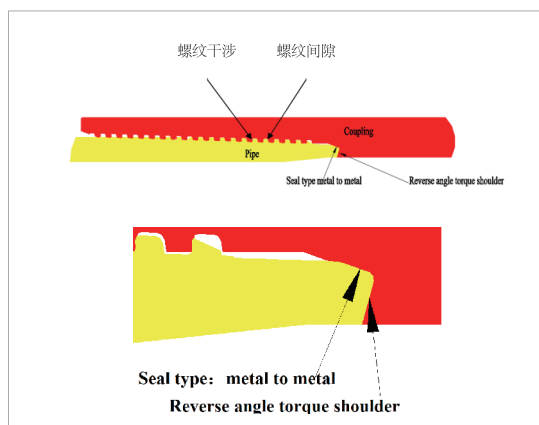

SL系列稠油热采井专用套管

SL SPECIALTY CASING FOR HEAVY OIL THERMAL RECOVERY

公司设计开发的SL系列稠油热采井专用套管已经通过了中国石油天然气集团公司西安管材研究所的全尺寸性能评价试验。采用Cr-Mo钢管体，具有热稳定性好、高温强度高和抗变形能力强等优点，注蒸汽作业大于6次。产品已大量应用于胜利油田不同稠油区块上，使用性能良好，得到了客户的广泛好评。

The SL specialty casing for heavy oil thermal recovery has passed the full-length performance evaluation by Xi'an Tubular Goods Research Center of CNPC. The pipe adopts Cr-Mo material, featuring good thermal stability, high tensile strength in high temperature and strong buckle resistance. It can survive more than 6 steam blowing services. The specialty casing has been used in different heavy oil blocks of Shengli Oilfield, showing satisfying performances.

